




MANURHIN K'MX 532TREND

Innovative technology

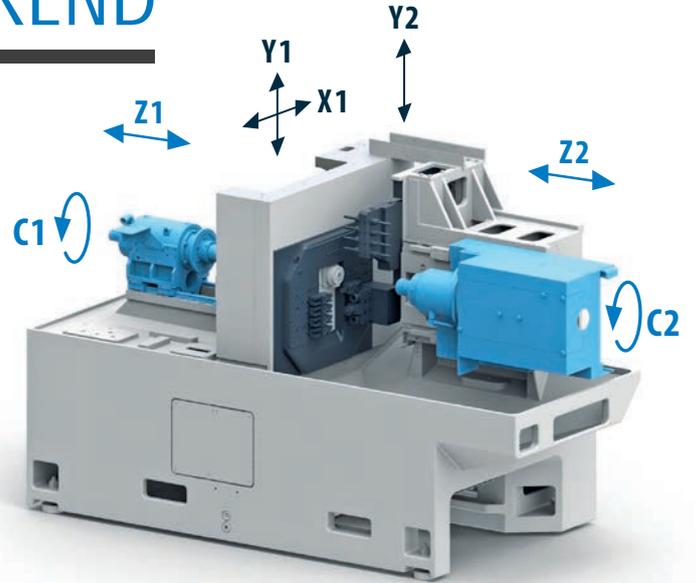


MANURHIN K'MX 532TREND

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
25 sec.	28 sec.	32 sec.	47 sec.

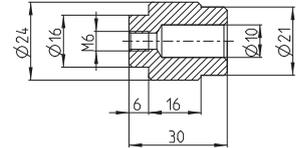


MANURHIN K'MX 532TREND

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
22 sec.	24 sec.	29 sec.	45 sec.

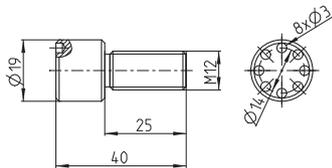



MANURHIN K'MX 532TREND

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
27 sec.	30 sec.	35 sec.	47 sec.

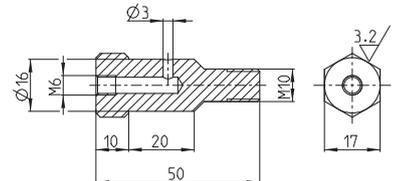


MANURHIN K'MX 532TREND

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
55 sec.	57 sec.	66 sec.	106 sec.

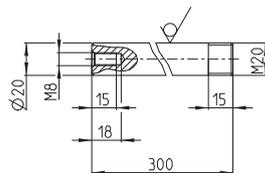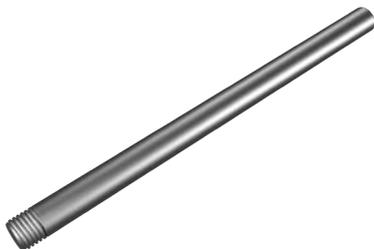

MANURHIN K'MX 532TREND

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
28 sec.	31 sec.	34 sec.	43 sec.



MANURHIN K'MX 532TREND

Aluminium EN AW 6061	Brass CuZn39Pb3	Automatic steel 1.0737	Stainless steel 1.4301
22 sec.	24 sec.	27 sec.	37 sec.

Cycle time is calculated for standard cutting tools, without any special technology, without high pressure coolant and primary with focus on optimal longevity of used cutting tools.